
ASSET

Supporting service unit
with bookcase

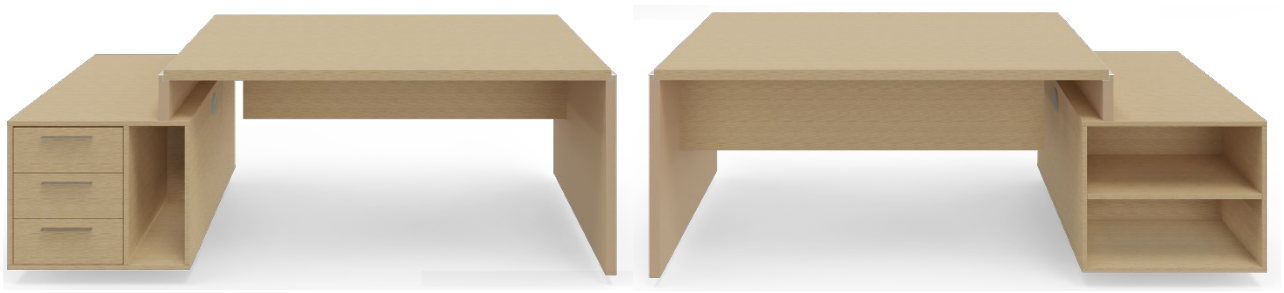

TECHNICAL DATA

supporting service unit with bookcase W. 65 cm D. 90 cm H. 56 cm	made of 18 mm thick chipboard panels (density: 720 kg/m³, formaldehyde emissions compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), faced with anti-reflex melamine resin and edged with 2 mm thick ABS edging, with rounded edges on the exposed sides. The unit is divided into two sections by a central panel: an operator side and a visitor side. Operator side: Divided into two vertical compartments: One measuring W. 396 mm × D. 531 mm × H. 495 mm, designed to accommodate a drawer unit with standard drawers or filing drawers. The other measuring W. 200 mm × D. 531 mm × H. 495 mm, designed to accommodate a computer. The computer compartment is fitted with two Ø 80 mm holes: one at the top of the side panel and one at the bottom. Both are supplied as standard with ABS cable lids, respectively for cable entry and exit. Visitor side: Features a compartment measuring W. 614 mm × D. 351 mm × H. 495 mm, fitted with an adjustable shelf. The structure is fitted with 27 mm high ABS feet, allowing for +10 mm adjustment for floor levelling. Optional accessory: Upon request, a wired connection module can be added, featuring a power socket, an RJ45 network connection and a Type-A USB port (power supply only), designed to fit into the Ø 80 mm hole in the top panel.
internal pedestal with 3 drawers or filing unit W. 40 cm D. 53 cm H. 49 cm	structure: made of 18 mm thick chipboard (density: 720 kg/m³, formaldehyde emissions compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), faced with anti-reflex melamine resin and edged with 2 mm thick ABS edging, with rounded edges on the exposed sides.
	drawer front panels or filing drawer melamine: made of 18 mm thick chipboard (density: 720 kg/m³, formaldehyde emissions compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), faced with anti-reflex melamine resin and edged with 2 mm thick ABS edging with rounded edges. Fitted with a metal handle, 176 mm long (128 mm pitch). No lock provided.
	drawers: made of PVC-coated chipboard in aluminium colour, mounted on roller runners with partial extension. Standard equipment includes a soft-closing system. **Useful internal dimensions: W. 31 cm D. 48,2 cm**
	filing drawer: made of a powder-coated steel sheet metal drawer, mounted on full-extension ball-bearing runners and fitted with a frame for suspended files and file support rods. Standard equipment includes a soft-closing system.


OPTIONALS

stationary tray	made of polystyrene and featuring 6 compartments.
supporting service unit finish	**melamine** MBI White MOB Light elm MRO Oak


	MNC Walnut	MFN Black ash	
internal pedestal finish	**melamine**		
	MBI White	MOB Light elm	MRO Oak
	MNC Walnut	MFN Black ash	
handle finish for internal pedestal	**metal**		
	BI White	AO Aluminium	NE Black
	CR Polished chrome		
stationary tray finish	**polystyrene**		
	NE Black		

ABACUS | Supporting service unit with bookcase

Pedestal with 3 drawers




Pedestal with 1 drawer and 1 filing unit



ABACUS | OPTIONALS

Stationary tray
W. 23,3 D. 33,6 H. 2,5 cm



ABACUS | Handles

Metal handle (Metal) - Spike/Alplus/Velvet/Asset/Vogue/Pop (B)



material: zamak
pitch: 128 mm



BI White
RAL 9010



AO Aluminium



NE Black
RAL 9005



CR Polished chrome