

POP EASY

Desk

FREZZA






TECHNICAL DATA

structure	<p><u>leg</u>: made of a 1.5 mm thick square-section steel bar (W. 1" 3/4 D. 1" 3/4) with rounded edges. The tube is laser-cut, bent and welded, forming the two uprights and beam. The uprights are inclined by 97°. Four U-shaped brackets, made of 2 mm thick steel sheet, are welded onto the leg beam. These brackets are used to attach the longitudinal beams and to support the worktop. All metal parts are painted with powders with an embossed finish. Inside the upright, at the lower end of the leg, a 4 mm thick steel plate is welded with a central hole for screwing in PE coated feet (Ø 1" 3/8). The feet allow an adjustment of + 10 mm for floor levelling.</p> <p><u>longitudinal beams</u>: each worktop is supported by two beams made of 1.5-mm-thick steel section bars (W. 1" 3/4 D. 1" 3/4) with rounded edges, attached to the leg brackets, powder coated with an embossed finish.</p> <p><u>intermediate leg (for connecting several desks in line with each other)</u>: consisting of a steel section bar beam with a 2 mm thick 80x40 rectangular cross-section with rounded edges, closed at the ends by plastic caps. 2 uprights are screwed under the frame by means of a 4 mm thick steel plate, made of 1.5 mm thick square-section steel bars (W. 1" 3/4 D. 1" 3/4) with radiused edges. On the inner side of the uprights there are slots for the application of an optional inspectable carter with the purpose of concealing the cable descent. A pair of "U" brackets made of 2 mm thick steel sheet are welded on the beam, which is used to attach the longitudinal beams and support the worktops. The lower ends of the uprights are equipped with feet (Ø 1" 3/4) made of polyethylene-coated steel, screwed onto polyethylene tips that are press-fitted into the base. The feet allow ±10 mm adjustment for floor levelling. All metal parts are painted with powders with an embossed finish.</p>
top	<p><u>melamine</u>: 18 mm thick chipboard (density 720 kg/m³, formaldehyde emission compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), faced with anti-reflex melamine resins and edged with ABS (2 mm th. with rounded edges) with matching or contrasting edge. The top is equipped with threaded inserts for attachment to the structure and for fixing the screens. The top is fixed with screws to the brackets which create a 5 mm gap between the top and the leg beam. H floor-to-top: 74 cm</p> <p><u>painted glass</u>: 10 mm thick, tempered in accordance with EN 12150 with flat polished edges, painted on the underside (if painting is white, extra-clear glass is used). Features steel studs glued to the glass underside, with a threaded hole for being fixed to the structure.</p>

melamine top desk dimensions	W	D	H	W	D	H	W	D	H
	31"1/2	31"1/2	29"1/8	31"1/2	23"5/8	29"1/8	70"7/8	90	29"1/8
39"3/8	31"1/2	29"1/8	39"3/8	23"5/8	29"1/8	78"3/4	90	29"1/8	
47"1/4	31"1/2	29"1/8	47"1/4	23"5/8	29"1/8				
55"1/8	31"1/2	29"1/8	55"1/8	23"5/8	29"1/8				
63"	31"1/2	29"1/8	63"	23"5/8	29"1/8				
70"7/8	31"1/2	29"1/8	70"7/8	23"5/8	29"1/8				
78"3/4	31"1/2	29"1/8							

glass top desk dimensions	W	D	H
	70"7/8	35"3/8	29"1/8
78"3/4	35"3/8	29"1/8	


Initial/intermediate/ending desk for composition dimensions	W	D	H	W	D	H
	47"1/4	31"1/2	29"1/8	47"1/4	23"5/8	29"1/8
55"1/8	31"1/2	29"1/8	55"1/8	23"5/8	29"1/8	
63"	31"1/2	29"1/8	63"	23"5/8	29"1/8	
70"7/8	31"1/2	29"1/8	70"7/8	23"5/8	29"1/8	
78"3/4	31"1/2	29"1/8				










standard finishes for metal leg and beam	metal		
	 ZGBI White embossed painted RAL 9010	 ZGAS Aluminium embossed painted RAL 9006	 ZGNE Black embossed painted RAL 9005

special finishes for metal leg and beam	metal leg* (special finishes only for leg)		
	 ZGVO Maize yellow embossed painted RAL 1006	 ZGR0 Titian red embossed painted RAL 050 50 60	 ZGB0 Gentle blue embossed painted RAL 250 60 15
 ZGB1 LED blue embossed painted RAL 260 40 45	 ZGG0 Pebble grey embossed painted RAL 7032	 ZGG5 Green grey embossed painted RAL 7009	


 ZCR - Chromed

metal beams (beam finish for legs in special finish)

 ZGAS Aluminium embossed painted RAL 9006

top finish	melamine		
	 MBI White	 MWP Pearl white	 MTR Dove
 MCE Concrete	 MOB Light elm	 MRO Oak	
 MNC Walnut	 MFN Black ash	 MNV Velvet black	

melamine with colour-contrasting edge

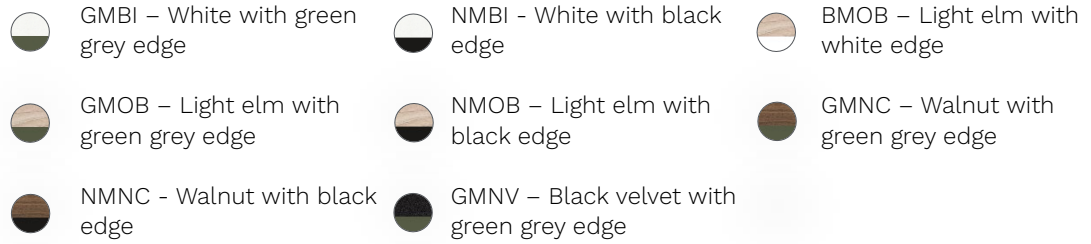

glass



OPTIONALS

1. front screen

melamine: made of 18-mm-thick chipboard (density 720 kg/m³, formaldehyde emission compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), faced with anti-reflex melamine resins, edged with ABS (2-mm thick with radiused edges). The screen is supported by 2 liquid-painted zamak clamps attached to the lower side of the top. It features a standard milling on the lower side for the insertion of the accessory bar (in this case the screen must be rotated 180°). The height of the screen from the desk top is 15" 1/8. A space of 5/8" remains between the screen and the top for cable passage. W. 39" 3/8 / 47" 1/4 / 55" 1/8 / 63" / 70" 7/8 / 78" 3/4 D. 3/4" H. 15" 1/8.

fabric: made of 18 mm thick fabric-covered chipboard (density 720 kg/m³, formaldehyde emission compliant with EU Regulation 2023/1464 and EPA TSCA Title VI). The screen is supported by 2 liquid-painted zamak clamps attached to the lower side of the top. The screen has a milling on the top, hidden under the fabric covering, for the insertion of an accessory bar. The fabric has to be torn in correspondence with the milling in order to insert the bar. The height of the screen from the desk top is 15" 1/8. A space of 5/8" remains between the screen and top for cable routing. W. 39" 3/8 / 47" 1/4 / 55" 1/8 / 63" / 70" 7/8 / 78" 3/4 D. 3/4" H. 15" 1/8.

glass: made of 6 mm thick tempered glass according to EN12150 with flat polished edges, etched on both sides. The screen is supported by 2 liquid-painted zamak clamps attached to the lower side of the top. The height of the screen from the desk top is 15" 1/8. A space of 7/8" remains between the screen and the top for cable passage. W. 39" 3/8 / 47" 1/4 / 55" 1/8 / 63" / 70" 7/8 / 78" 3/4 D. 1/4" H. 15" 1/8

sound-absorbing: 30 mm thick panel with recycled polyester fibre interior (average density 50 kg/m³), edged on three sides with 1 cm thick forex reinforcement. Base in 3x3 cm shaped plywood with sockets for the insertion of the fixing hardware. The panel is then covered in fabric and fixed to the base with metal clips. Total thickness 1" 1/4. Fixed to the top by means of clamps. W. 39" 3/8 / 47" 1/4 / 55" 1/8 / 63" / 70" 7/8 / 78" 3/4 D. 1/4" H. 15" 1/8

2. lateral screen

melamine: made of 18 mm-thick chipboard (density 720 kg/m³, formaldehyde emission compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), faced with anti-reflex melamine resins, edged with ABS (2 mm thick with radiused edges). The screen is supported by 2 zamak clamps, painted and attached to the lower side of the top by means of a 4-mm thick powder-coated steel plate. The height of the screen from the worktop is 15" 1/8. W. 31" 1/2 D. 3/4" H. 15" 1/8

fabric: made of 18-mm-thick chipboard (density 720 kg/m³, formaldehyde emission compliant with EU Regulation 2023/1464 and EPA TSCA Title VI) covered with fireproof fabric. The screen is supported by 2 liquid-coated zamak clamps, fixed on the lower side of the top by means of a 4-mm thick powder-coated steel plate. The height of the screen from the worktop is 15" 1/8. W. 31" 1/2 D. 3/4" H. 15" 1/8

glass: made of 6 mm thick tempered glass according to EN12150 standard with flat polished edges, etched on both sides. The screen is supported by 2 liquid-painted zamak clamps attached to the lower side of the top. The height of the screen from the worktop is 15" 1/8. W. 31" 1/2 D. 1/4" H. 15" 1/8.

3. accessory bar

consisting of an extruded aluminium bar and supplied with 3 caps (2 end caps and 1 intermediate cap) made of ABS. W. 39"3/8 / 47"1/4 / 49" 1/4 / 55"1/8 / 63" / 65" / 70"7/8 / 78"3/4 P. 3/4" H. 1/4".

4. document holder	made of 1 mm thick folded steel sheet, powder coated and open on the front side. It does not require fastening as it is shaped to hook onto the accessory bar. W. 13" D. 9" H. 7"7/8.
5. shelf for document holder	1 mm thick steel sheet, bent and powder-coated. To be placed on dox holder. W. 13" D. 9" H. 3"7/8.
6. stationary tray	1 mm thick steel sheet folded and powder coated. Does not require fastening as it is shaped to hook onto the accessory bar. W. 11"3/4 D. 3"7/8 H. 1".
7. objects tray	made of 1 mm thick steel sheet, folded and powder coated. It does not require fastening as it is shaped to hook onto the accessory bar. W. 5"1/8 D. 3"7/8 H. 3"7/8.
8. A4 paper tray	made of 1 mm thick steel sheet, folded and powder coated and open on the front side. It does not require fastening as it is shaped to hook onto the accessory bar. W. 13" D. 9" H. 2".
9. modesty panel	<u>melamine</u> : 18 mm thick chipboard (density 720 kg/m ³ , formaldehyde emission compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), faced with anti-reflex melamine resins, edged with ABS (2 mm thick with rounded edges). The modesty panel is fitted with 1.5 mm thick steel plate brackets painted with powders with an embossed finish. The bracket is hung to the rear beam by means of a U-shaped hook. A space of 30 mm remains between the modesty panel and the beam for cable passage. The length of the modesty panel is 7" 7/8 shorter than that of the desk (4" on each side). W. 31" 1/2 / 39" 3/8 / 47" 1/4 / 55" 1/8 / 63" / 70" 7/8 D. 3/4" H. 11" 3/4.
10. desk pad	1.5 mm thick steel sheet covered in eco-leather. W. 31" 1/2 P. 19" 3/4.
11. hanging drawer	Consisting of structure, drawer and front made of 0.8 mm thick steel sheet painted with powders in an embossed finish. The drawer slides on damped ball-bearing runners with partial extension. The bottom is equipped with 4 threaded inserts for attaching the helmet/bag holder. The maximum load capacity is 6.6 lbs. Useful internal dimensions: L. 13" 1/4 P. 14" 1/2 H. 2" 3/4; External dimensions: L. 16" 1/2 P. 15" 3/8 H. 4".
12. helmet/bag holder	made of 1.2 mm thick steel sheet painted with powder with an embossed finish. Fastened to the lower part of the drawer structure with metric screws. The back is 4" high. Maximum load capacity is 17,6 lbs. W. 16" 1/2 D. 15" H. 12" 5/8.
13. top access	<u>metal</u> : made of anodised or powder-coated extruded aluminium with two ABS closing elements. The upper part features an anodised or powder-coated extruded aluminium door and a dust cover profile at the outlet. The door can be hinged open on one side only. W. 12" 1/2 D. 4" 3/4 H. 1"
14. cable tray for top access	made of 1 mm thick U-shaped powder-coated steel sheet. The tray interlocks with the top access frame. Fitted with holes on the lower side that can be used for attaching multiple-plug sockets (by means of screws or clamps, not included) or for earthing (by screwing the cable lug for earthing with screw and bolt, not included). W. 11"3/8 D. 3"3/4 H. 3"7/8.
15. cable tray	made of 1 mm thick steel sheet powder coated with an embossed finish. It can be attached to the top of the modesty panel or fastened under the top with wooden screws. Fitted with holes on the lower side that can be used for attaching multiple-plug sockets (by means of screws or clamps, not included) or for earthing (by screwing the cable lug for earthing with screw and bolt, not included). W. 19" 3/4 / 27" 1/2 D. 4" 3/8 H. 3" 1/8
16. inspectable cable tray	made of 1-mm-thick powder coated steel sheet with an embossed finish and equipped with side openings (W. 2") for cable exit. Fitted with holes on the lower side that can be used for attaching multiple-plug sockets (by means of screws or clamps, not included) or for earthing (by screwing the cable lug for earthing with screw and bolt, not included). The tray is fixed under the top, in correspondence with the structure brackets, by means of a pair of 2 mm thick steel sheet brackets. The type of attachment to the tray allows it to be reclined for inspection (max angle 30°). The distance between the top and tray is 4" 3/8, the height of the outer side of the tray is 3" 1/8, while the inner side is 1" 5/8. W. 31" 1/2 / 39" 3/8 / 47" 1/4 / 55" 1/8 / 63" / 70" 7/8 D. 5" 3/4 H. 3" 1/2.

17. CPU holder	(PCPU01) made of 1 mm thick steel sheet, folded and epoxy powder-coated with an embossed finish. Fixed to the top with wooden screws. The maximum load capacity is 22 lbs. W. 8" 5/8 D. 19" 3/4 H. 21" 7/8.
18. height and width-adjustable CPU holder	(EEPCA) consisting of a plastic-coated metal supporting structure, base and side supports to hold the computer case in place. Comes with an upper bracket to secure it to the work surface using wooden screws. The side and top supports are adjustable to fit different case sizes. Height adjustment (internal space): 15" 3/8 to 21" 1/4; Width adjustment (internal space): 5" 1/8 to 9". The maximum load capacity is 22 lbs.
19. closing panel	made of 18 mm thick chipboard ((density 720 kg/m ³ , formaldehyde emission compliant with EU Regulation 2023/1464 and EPA TSCA Title VI) finished with anti-reflex melamine resins, edged with 2 mm thick rounded ABS and supported by 6 ABS supports, which are used to fix the panel to the leg with 4 screws.
20. carter for vertical cable management	consisting of a 1 mm thick folded steel sheet base, powder-coated with an embossed finish. 2 magnets with a diameter of 3/4" are located in the hollow part for direct attachment to the metal leg. W. 2" D. 1" H. 22"
21. vertical cable duct	composed of a 3 mm thick folded powder coated steel sheet base (W. 5' 7/8 D. 5' 7/8 H. 1/4') and a series of rectangular plastic elements (W. 2" 1/2 D. 1" 5/8 H. 1" 1/8) joined together to guide the cables to the top. For each vertebra there are 45 elements (H. max. 33" 1/8). At the end there is an element for fixing the vertical cable management to the top (using wood screws).
22. removable carter (for intermediate leg)	made of 1 mm thick powder-coated steel plate and fitted with hooks for attachment to the middle of the legs. A space of 40 mm remains between the floor and the lower edge of the carter to allow for the passage of cables. The same space is available at the top between the leg beam and the upper edge of the carter. W. 6" 1/2 D. 2" H. 23" 1/4
electrification	the desk can be equipped with the following electrification: NETBOX POINT – VERSAQ – VERSATEK – ALUPOWER (please refer to the electrification section for more specifications).


ABACUS | Desks

Desks

Desk – Melamine top




Desk – Glass top




Return top

Hanging return top for desk
D. 31"1/2




Intermediate return top for desk
D. 31"1/2




Return top with units


Hanging return top with 4 drawer pedestal for desk D. 31"1/2



Hanging return top with 2 drawer and 1 filing unit pedestal for desk D. 31"1/2



Hanging return top for desk-height cabinets




Hanging return top for desk-height cabinets configurations


Open cabinet for return top



2-door cabinet




Cabinet with 2 filing units




Hanging desk

Hanging desk – Melamine top




Hanging desk – Glass top



Desk with predisposition for attachment to Phylo bookcase W. 31"1/2



Desk with predisposition for attachment to unit H. 29"1/8



Desks for compositions

INITIAL


Initial desk - D. 31"1/2 / 23"5/8



Initial desk with attachment to H. 29"1/8 unit - D. 31"1/2 / 23"5/8



Initial desk for supporting service unit - D. 31"1/2



INTERMEDIATE

Intermediate desk - D. 31"1/2 / 23"5/8



Desk with attachment to 2 H. 29"1/8 units - D. 31"1/2 / 23"5/8




ENDING


Ending desk - D. 31"1/2 / 23"5/8



Ending desk with attachment to H. 29"1/8 unit - D. 31"1/2 / 23"5/8




Ending desk for supporting service unit - D. 31"1/2





ABACUS | OPTIONALS


1. Front screens



melamine



fabric



glass

Sound-absorbing

2. Lateral screens



melamine



fabric




glass


3. Accessory bar for melamine/fabric screens




4. Document holder




5. Shelf for document holder




6. Stationary tray



7. Objects tray



8. A4 paper tray




9. Modesty panel




10. Eco-leather desk pad




11. Hanging metal drawer (max capacity: 6,61 lbs)




12. Bag/helmet holder



13. Top access



14. Cable tray for top access




15. Cable tray




16. Inspectable cable tray




17. CPU holder




18. height and width adjustable CPU holder




19. Closing panel holder



20. Carter for vertical cable management

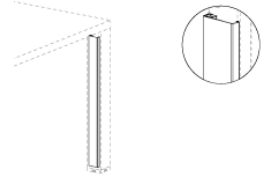

21. Vertical cable duct



22. Pair of removable carters (for intermediate leg)

