SPIKE

Meeting table D. 160/180 cm

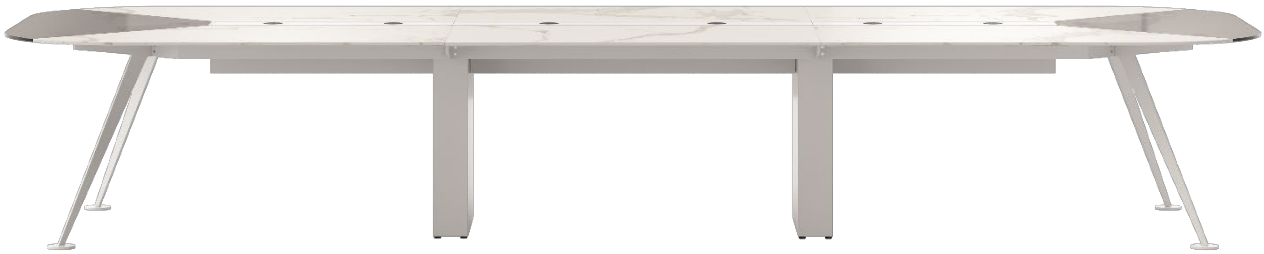

TECHNICAL DATA

design Giorgio Topan

structure	leg: consisting of two 10 mm thick, laser-cut steel sheet structural elements and a steel joining element. The distinctive leg design, with a 30° inclination, has a 347 mm extension in the upper part towards the edge of the table top and a further 220 mm extension, fixed by means of a joint, pointing towards the centre of the table. Both extensions are equipped at the end with a fixing support for the top. The lower part of the leg features a hole (Ø 6 mm) for screwing in a steel disc (Ø 100 mm, H. 10 mm). The disc has a lower circular groove for inserting an anti-slip rubber element. All metal parts are painted with epoxy powders with a plain finish (for the bronzed version) or an embossed finish (for white and black version), or chrome plated.
	intermediate leg with integrated cable tower leg: (for connecting several modules together) consisting of an intermediate beam and a cable tower leg made of 2 mm thick steel sheet. The cable tower leg has an upper opening to allow cables to pass uninterruptedly between the cable trays, and a lower opening to let the cables exit to the floor. The tower leg is fixed to the intermediate beam of the meeting table by means of two 4 mm thick steel sheet brackets painted with epoxy powders. At the bottom it is equipped with 4 adjustable feet that allow +10 mm for levelling. The cable tower leg recesses 50 mm from the edge of the top. All metal parts are painted with epoxy powders in an embossed finish. Meeting table dimensions D. 160 cm: W. 60 cm D. 12,5 cm H. 67,6 cm. Meeting table dimensions D. 160 cm: W. 80 cm D. 12,5 cm H. 67,6 cm.
	beams: two for each top, made from a 10 mm thick and 60 mm high steel sheet, painted with epoxy powders with a plain, embossed or chrome-plated finish depending on the finish of the leg. The beams are fixed to the leg joints with metric screws. To prevent the top from bending in the middle part, each beam is equipped with a central hole on the upper side for inserting a steel spacer pin. When the top is made of glass, a plastic buffer is glued to the upper side of the spacer pin. The meeting table beams are placed at a distance of 20 mm from each other.
	cable tray: made of 1 mm thick steel sheet, folded and painted with epoxy powders in an embossed finish, open at the sides to allow the passage of cables and equipped with two holes on the lower side. It is fitted in the centre of the meeting table module. A removable central insert is provided to make it inspectable, in the same colour as the tops for the melamine and wood versions or in matt lacquer for the HPL and glass versions. The insert can optionally be fitted with the following electrification systems: VERSATURN - VERSADOT.
tops, extensions	melamine: 25 mm thick chipboard (density 720 kg/m^3, formaldehyde emission compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), faced with anti-reflex melamine resins and edged with ABS (2 mm thick with rounded edges). The top is equipped on the lower side with circular grooves designed to house the leg joint plate and with threaded inserts for fixing the latter. The plate is made of a 4 mm thick steel plate painted with epoxy powders.
	veneered: 29 mm thick mdf (density 720 kg/m^3, formaldehyde emission compliant with EU Regulation 2023/1464 and EPA TSCA Title VI) faced on both sides with natural wood veneer and edged with veneer (2 mm thick with rounded edges). The top perimeter is tapered. The surfaces are painted with

acrylic-based stains. The top is equipped on the lower side with circular grooves designed to house the leg joint plate and with threaded inserts for fixing the latter. The plate is made of a 4 mm thick steel plate painted with epoxy powders.

hpl: made of a 12 mm thick bilaminated high-pressure panel (Hpl). The top is equipped with 4 mm thick steel joint plates painted with epoxy powders.

glass: tempered in accordance with EN 12150, 12 mm thick with flat polished edges. The top has 3 mm rounded edges. The top is fitted with 60 mm diameter stainless steel supports glued to the lower side with a threaded hole for fixing the leg.

meeting table dimensions (in cm)

W	D	H	W	D	H
320	160	75	320	180	75
420	160	75	420	180	75

dimensions of intermediate element for meeting table (in cm)

W	D	H	W	D	H
132	160	75	132	180	75

structure finish

metal

- ZGBI White embossed painted RAL 9010
- ZBR Bronze painted
- ZGNE Black embossed painted RAL 9005
- ZCR Chrome

cable tray finish

metal

- ZGBI White embossed painted RAL 9010
- ZGNE Black embossed painted RAL 9005

tower leg finish

metal

- ZGBI White embossed painted RAL 9010
- ZGNE Black embossed painted RAL 9005

top finish for melamine meeting table

melamine top

- MBI White
- MTR Dove
- MCE Concrete
- MOB Light elm
- MRO Oak
- MNC Walnut
- MFN Black ash
- MNV Black velvet

melamine central insert

- MBI White
- MTR Dove
- MCE Concrete
- MOB Light elm
- MRO Oak
- MNC Walnut
- MFN Black ash
- MNV Black velvet

top finish for veneer meeting table

veneer top

- WBI White ash
- WNS Dark walnut
- WFN Black ash

veneer central insert

- WBI White ash
- WNS Dark walnut
- WFN Black ash

veneer extension

- WBI White ash
- WNS Dark walnut
- WFN Black ash

glass extension

- VØØ Clear glass
- VFM Smoked glass

top finish for hpl meeting table	**hpl top** HLCB White Calacatta HLMZ Brown zebra marble
	laquered central insert LAW1 White RAL 9016 LANE Black RAL 9011
	hpl extension HLCB White Calacatta HLMZ Brown zebra marble
	glass extension VØØ Clear glass VFM Smoked glass
top finish for glass meeting table	**glass top** VØØ Clear glass VFM Smoked glass
	laquered central insert LAW1 White RAL9016 LANE Black RAL 9011

OPTIONALS

vertical cable duct	metal: made of 1 mm thick steel plate, folded and painted with epoxy powders with a plain finish (for the bronzed version) or an embossed finish (for white and black version), or chrome plated. It attaches to the leg by means of three magnets on the inner side.
electrification	the desk can be equipped with the following electrification: VERSATURN - VERSADOT (please refer to the electrification section for more specifications).

ABACUS | Meeting tables D. 160/180 cm

Meeting tables D. 160/180 cm

melamine top



veneer top



veneer top with glass extensions



hpl top



hpl top with glass extensions



glass top



Intermediate element for meeting table D. 160/180 cm

melamine top



veneer top



hpl top



glass top



ABACUS | OPTIONALS

vertical cable duct

