SABREE

Meeting table

TECHNICAL DATA

design M. Armani

base	The base is made of matt-finished polyethylene and features a fluid, continuous, undulating design with a diameter of Ø 50 cm. Inside the base are eight semi-circular concrete ballast weights (W. 37.5 cm, H. 10 cm, D. 18.75 cm), each weighing 12.3 kg. The base is not equipped with adjustable levelling feet; instead, felt pads are applied to the underside to protect floor surfaces.
top	melamine: made of 12 mm thick chipboard (density 720 kg/m³, formaldehyde emissions compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), finished with anti-reflex melamine resins and edged with ABS (2 mm thick with rounded corners). The top is fitted with a 25 mm thick melamine under-top panel for attachment to the base.
	matt painted mdf: made from 25 mm thick mdf (density 830 kg/m³, formaldehyde emissions compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), powder-coated with a matt finish, with 40 mm rounded edges. The top is fitted with a 25 mm thick melamine under-top panel for attachment to the base.
	wavy glass painted under side: 12 mm thick extra-clear tempered glass, compliant with EN 12150, with rounded edges and painted on the underside using water-based paints. The top is fitted with a 25 mm thick melamine under-top panel for attachment to the base.
	veneer: 50 mm thick, made from mdf (density 830 kg/m³, formaldehyde emissions compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), with 48 mm radiused edges, veneered on both sides with natural wood veneer using a membrane press process. The surfaces are finished with an acrylic-based stain. The top is fitted with a circular fixing plate in 0.5 mm thick steel sheet for attachment to the base.
top with central cable duct **MV + ELE** **W + ELE**	The tabletop features a centrally positioned, inspectable cable access cover with a diameter of Ø 28 cm, manufactured from the same material and thickness as the top itself to ensure continuity of the grain pattern or surface texture. Both the outer edge of the cover and the corresponding opening in the tabletop are machined with a 45° bevel. The fit tolerance between the inclined profile of the cover and that of the opening is specifically calibrated to maintain a constant 14 mm gap for cable routing.
	matt painted mdf (**MV + ELE**): made from 25 mm thick mdf (density 830 kg/m³, formaldehyde emissions compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), powder-coated with a matt finish, with 40 mm rounded edges. The top is fitted with a 25 mm thick melamine under-top panel for attachment to the base.
	veneer (**W + ELE**): 50 mm thick, made from mdf (density 830 kg/m³, formaldehyde emissions compliant with EU Regulation 2023/1464 and EPA TSCA Title VI), with 48 mm radiused edges, veneered on both sides with natural wood veneer using a membrane press process. The surfaces are finished with an acrylic-based stain. The top is fitted with a circular fixing plate in 0.5 mm thick steel sheet for attachment to the base.
	A 18 mm thick circular chipboard panel (Ø 35.5 cm) (density 720 kg/m³, formaldehyde emissions compliant with EU Regulation 2023/1464 and EPA TSCA Title VI) is integrated into the base of the table, finished with anti-reflex melamine resins. This internal technical panel is specifically machined and provided with a Ø 60 mm opening to accommodate the configuration and concealed housing of up to 6 VERSADOT modules.

table with oval top dimensions (in cm)

melamine			matt painted mdf			wavy glass painted under side		
W	D	H	W	D	H	W	D	H
240	120	74	240	120	75	240	120	74
280	120	74	278	120	75	280	120	74

veneer		
W	D	H
240	120	75
280	120	75

modular table with oval top dimensions (in cm)

melamine			matt painted mdf			veneer		
W	D	H	W	D	H	W	D	H
320	120	74	320	120	75	320	120	75

Intermediate element for modular table dimensions (in cm)

melamine			matt painted mdf			veneer		
L	P	H	W	D	H	W	D	H
120	120	74	120	120	75	120	120	75

base finish

matt-painted polyethylene

- CNBI White
- CNAV Light ivory
- CNDO Dusty Orange
- CNSG Stone grey
- CNAT Anthracite

top finish

melamine

- MBI White
- MTR Dove grey
- MCE Concrete
- MOB Light elm
- MRO Oak
- MNC Walnut
- MFN Black ash
- MNV Velvet black

matt painted mdf

- MVDO Dusty Orange
- MVCD Rope grey

wavy glass painted under side (only for W. 240-280 cm tables)

- VIAV Light ivory
- VINE Black

veneer

- WFC Oak-stained ash
- WFD Dusty orange stained ash
- WFN Black ash

OPTIONALS

cable duct

made of 1.5 mm thick steel sheet, folded and powder-coated with epoxy powder in a black embossed finish. Dimensions: W 60/80/100 cm, D. 19.5 cm, H. 7 cm

electrification

The meeting table can be fitted with the following electrification options:
VERSALIFT for melamine tops only
VERSADOT for melamine tops only or for tops with a central cable duct (**MV + ELE, W + ELE**)
Socket for 2 USB 'Type C' ports, max. 100 W, recharging only, with universal power supply 110–240 V AC 50/60 Hz (EU/UK/US power cable included)
(please refer to the electrification section for more specifications).

ABACUS | Table

Melamine oval top

M

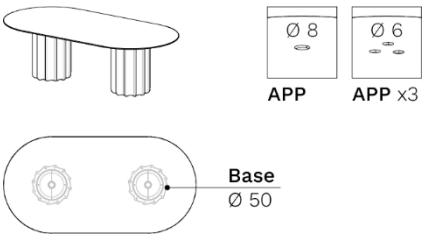

Matt painted mdf oval top

MV



Matt painted mdf oval top
with central cable duct
MV + ELE



Wavy glass painted under side oval top
VI



Veneer oval top

W



Veneer oval top
with central cable duct
W + ELE



ABACUS | Modular table

Melamine oval top

M

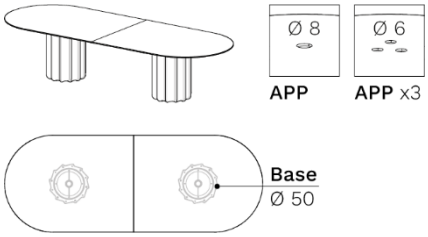

Matt painted mdf oval top

MV



Matt painted mdf oval top
with central cable duct
MV + ELE



Veneer oval top

W



Veneer oval top
with central cable duct
W + ELE



Intermediate element for modular table

Melamine top

M

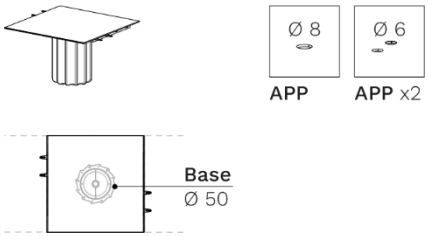

Matt painted mdf top

MV



Matt painted mdf top
with central cable duct
MV + ELE



Veneer top

W



Veneer top with central cable duct

W + ELE



ABACUS | OPTIONALS

Cable duct

VERSALIFT | 2 x POWER (Schuko max. 3,4 - US max. 1,8 KW) - 1 x USB “Type A” + 1 x USB “Type C”, max. 15 W recharging only



VERSALIFT | 2 x POWER (UK) max. 2,8 KW



VERSALIFT | 1 x POWER (UK) max. 2,8 KW - 1 x USB “Type A” + 1 x USB “Type C”, max. 15 W recharging only



VERSADOT | 1 x POWER (DE max. 3,4 KW - UK max. 2,8 KW - UNIV max. 3,4 KW)



VERSADOT | 1 x USB “Type A” + 1 x USB “Type C”, max. 12 W recharging only

Socket for 2 USB “Type C” max. 100 W recharging only, with adaptor